


101001 HYDROCASE MICRO LED

Square small floodlight for outdoor installation on a façade/wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. built-in LED driver 220-240V 50-60Hz, with 1 CREE XP-G3 LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 1 x 1W CREE "XP-G3" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Nickel-plated brass cable gland PG9
- 1 mt. neoprene power cable included

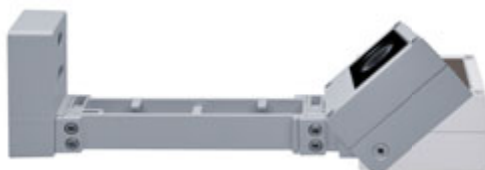


101002 - WITH EXTENDED FIXING BRACKET OPTION



AC001 - HEARTH SPIKE

1 WATT
220-240V 50-60HZ ELECTRONIC
IP65
0.55 KG UNIT GROSS WEIGHT

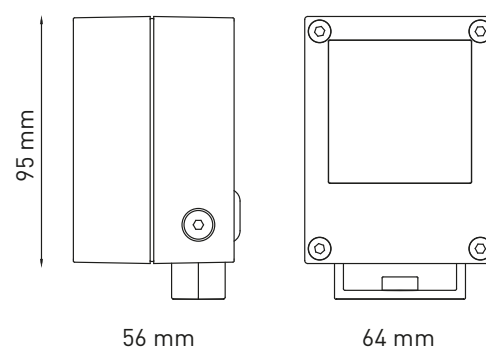

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	115	115.00	☒ TEXTURED GREY ☐ MATT WHITE (ON REQUEST) ☐ MATT BLACK (ON REQUEST)
		30°	110	110.00	
		45°	104	104.00	
	4.000°K NEUTRAL-WHITE	10°	120	120.00	
		30°	114	114.00	
		45°	109	109.00	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4.000°K NEUTRAL-WHITE, ● BLUE