

101003 HYDROCASE MINI LED


Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. built-in LED driver 220-240V 50-60Hz, with 3 CREE XP-G3 LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 3 x 1W CREE "XP-G3" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Nickel-plated brass cable gland PG9
- 1 mt. neoprene power cable included



101004 - WITH EXTENDED FIXING BRACKET OPTION

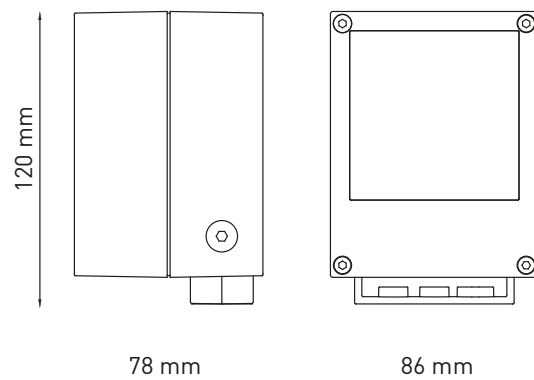

AC001 - HEARTH SPIKE

3 WATT
220-240V 50-60HZ ELECTRONIC
IP65
0.80 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	346	115.33	TEXTURED GREY MATT WHITE (ON REQUEST) MATT BLACK (ON REQUEST)
		30°	329	109.66	
		45°	312	104.00	
	4.000°K NEUTRAL-WHITE	10°	360	120.00	
		30°	342	114.00	
		45°	325	108.33	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: 4.000°K NEUTRAL-WHITE, BLUE