

101302 HYDROTWIST MINI LED



NEW

Designed by **paolovilla**design



Floodlight for outdoor installation on a façade/wall, with special articulated joint with spheres, allowing endless positions of the fixture head. Phosphochromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets and o-rings, with non-visible screws in stainless steel. Special optics with "invisa-light" technology. Built-in LED driver, with 4 CREE XP-G2 LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 4 CREE "XP-G2" LED
- Electronic transformer 220/240V 50/60Hz included
- Special optics with "invisa-light" technology.
- Stainless steel screws
- Silicone rubber gaskets and o-rings.
- Tempered safety glass.
- M12 rubber grommet Rutaseal® in EPDM

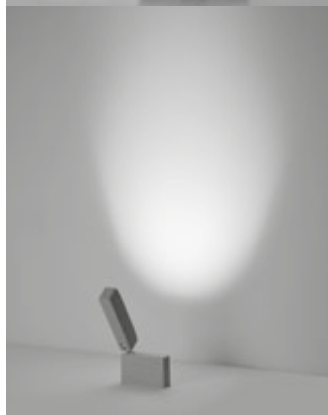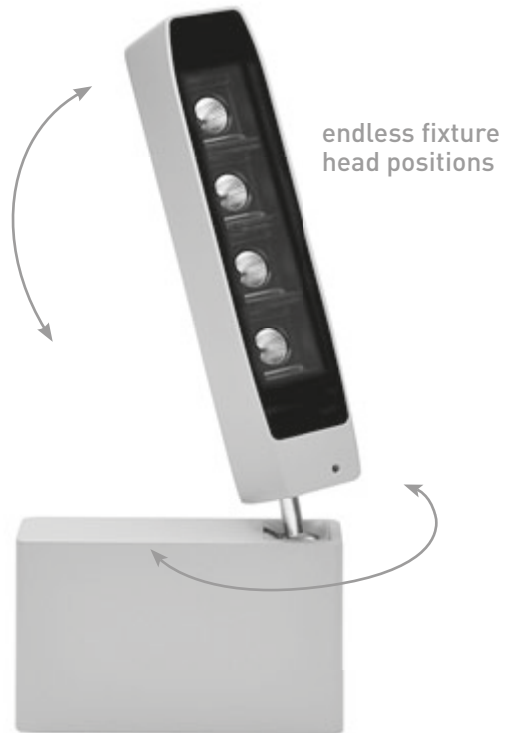

AC037
EARTH SPIKE

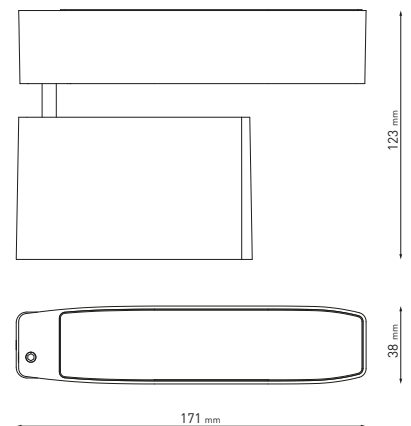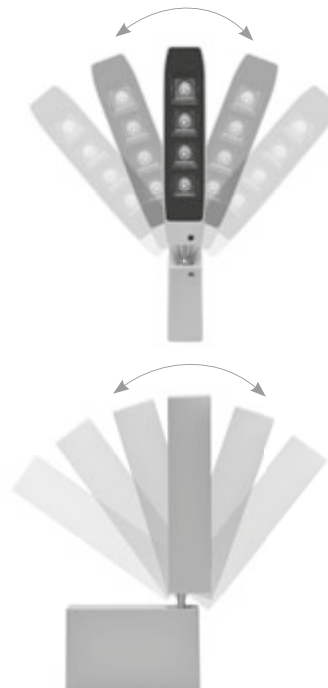

7 WATT
220-240V 50-60HZ ELECTRONIC
IP65
1,20 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	18°	560	80.00	TEXTURED GREY
		36°	540	77.14	MATT WHITE (ON REQUEST)
	4.000°K NEUTRAL-WHITE	18°	616	88.00	MATT BLACK (ON REQUEST)
		36°	584	83.43	