
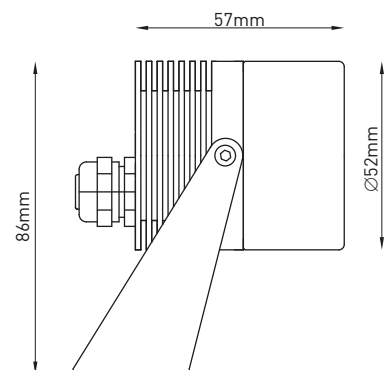


301001 HYDROSCUBA MICRO LED - SURFACE MOUNTED

Small underwater projector, surface mounted, completely made in stainless steel AISI 316L, silicone o-rings, 350/500mA remote driver needed, with 1 CREE XP-G3 LED. IP 68 rating.

Energy Label **A++**

- Material: completely made in stainless steel AISI 316 L marine grade
- Stainless steel AISI 316 L marine grade trim.
- NR. 1 x 1.5W CREE "XP-G3" LED
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Protection system IP68 with maximum immersion depth 3 mt.
- M12 cable gland made in stainless steel AISI 316.
- 8 mt. neoprene power cable included
- Adjustable through 200°

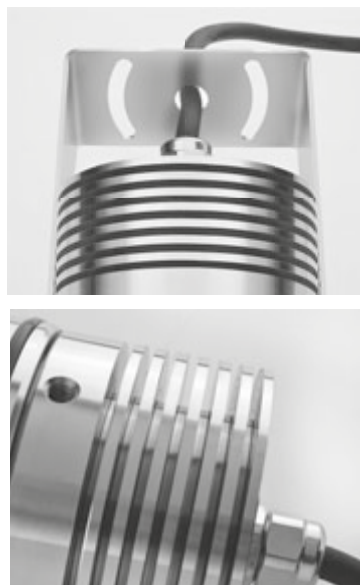

1.5 WATT
REMOTE DRIVER 350/500 MA NEEDED
IP68 - 3 METERS DEPTH
1.50 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	144	96.00	STAINLESS STEEL
		30°	137	91.34	
		45°	130	86.67	
	4.000°K NEUTRAL-WHITE	10°	150	100.00	
		30°	143	95.34	
		45°	136	90.67	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: BLUE

REMOTE DRIVER SELECTION

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
TCI ITALY	122086	CONSTANT CURRENT 350 MA	4W	IP20	MIN 1 - MAX 2
TCI ITALY	122204	CONSTANT CURRENT 350 MA / 500 MA	25W - 35W	IP20	MIN 1 - MAX 16
MEANWELL	LPC-20-350	CONSTANT CURRENT 350 MA	16.8W	IP67	MIN 4 - MAX 12
MEANWELL	LPC-20-700	CONSTANT CURRENT 700 MA	21W	IP67	MIN 4 - MAX 8
MEANWELL	LPF-25-48	CONSTANT CURRENT 530 MA	25W	IP67	MIN 10 - MAX 16