
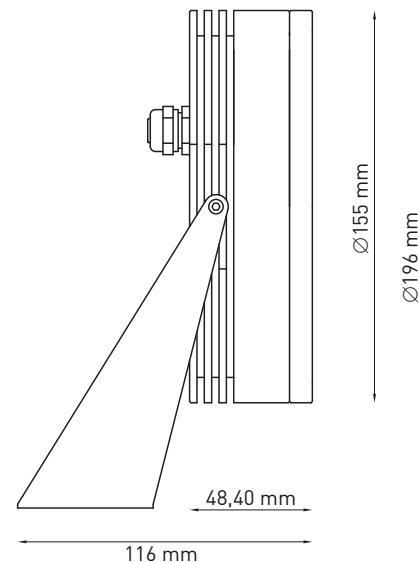


301005 HYDROSCUBA MEDIUM LED – SURFACE MOUNTED

Underwater projector, surface mounted, completely made in stainless steel AISI 316L, silicone o-rings, 350/500mA remote driver needed, with 5 CREE XP-G2 LED. IP 68 rating.

Energy Label **A++**

- Material: completely made in stainless steel AISI 316 L marine grade
- Stainless steel AISI 316 L marine grade trim.
- NR. 5 x 1.5W CREE "XP-G2" LED
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Protection system IP68 with maximum immersion depth 3 mt.
- M12 cable gland made in stainless steel AISI 316.
- 8 mt. neoprene power cable included
- Adjustable through 200°

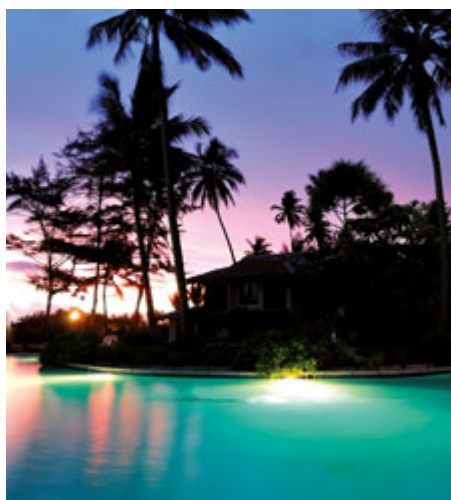

8 WATT
REMOTE DRIVER 350/500 MA NEEDED
IP68 – 3 METERS DEPTH
5.00 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	M 10°	720	90.00	STAINLESS STEEL
		M 30°	684	85.50	
		M 45°	650	81.25	
	6.000°K COLD-WHITE	M 10°	750	93.75	
		M 30°	713	89.13	
		M 45°	677	84.63	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4.000°K NEUTRAL-WHITE, ● BLUE

REMOTE DRIVER SELECTION

BRAND	MANUFACTURER CODE	TYPE	WATT	IP RATE	NUMBERS OF FIXTURES
TCI ITALY	122356	CONSTANT CURRENT 500 MA	12W	IP20	1
TCI ITALY	122204	CONSTANT CURRENT 350 MA / 500 MA	25W - 35W	IP20	MIN 1 - MAX 3
MEANWELL	LPC-20-350	CONSTANT CURRENT 350 MA	16.8W	IP67	MIN 1 - MAX 3
MEANWELL	LPC-20-700	CONSTANT CURRENT 700 MA	21W	IP67	MIN 1 - MAX 2
MEANWELL	LPF-25-48	CONSTANT CURRENT 530 MA	25W	IP67	MIN 2 - MAX 3