



401014 HYDROTECH MEDIUM 01 SQUARE LED

Square wall mounted luminaire for outdoor installation on a façade/wall, with light distribution downward only. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 5 CREE XP-G3 LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 5 x 1.5W CREE "XP-G3" LED down.
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws.
- Silicone rubber gasket.
- Tempered safety glass.
- M20 rubber grommet Rutaseal® in EPDM
- Adjustable +/- 15 degrees.

FullRGB
AVAILABLE ON REQUEST

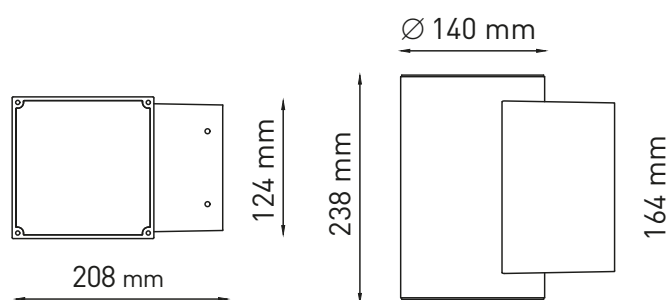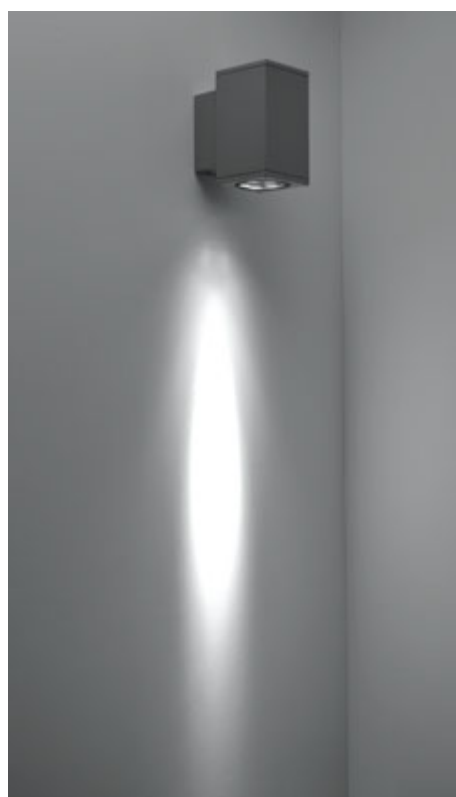

8 WATT
220-240V 50-60HZ ELECTRONIC
IP65
3.00 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	 10°	720	90.00	 TEXTURED GREY  MATT WHITE (ON REQUEST)  MATT BLACK (ON REQUEST)
		 30°	684	85.50	
		 45°	650	81.25	
	4.000°K NEUTRAL-WHITE	 10°	750	93.75	
		 30°	713	89.13	
		 45°	677	84.63	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST:  BLUE