


402302 HYDROPLAFO 02 LED



Round surface mounted luminaire for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, opal PMMA diffuser, moulded silicone gasket and stainless steel screws. Anti-shock half grid-cover. Built-in LED driver 220-240V 50-60Hz, with 11 x CREE XT-E LED. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance extruded copper-free aluminum body and fixing arms.
- Coating: polyester powder coating with phosphochromating pre-finish
- Anti-shock half grid-cover
- Opal PMMA diffuser.
- NR. 11 x CREE "XT-E" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket.

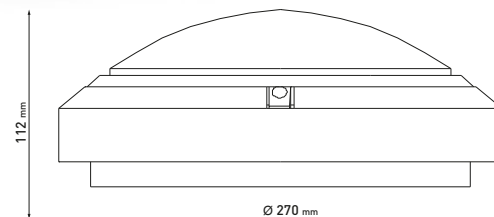

	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
13 WATT 220-240V 50-60HZ ELECTRONIC IP65 3,00 KG UNIT GROSS WEIGHT	HIGH-POWER LED	 3.000°K WARM-WHITE	 DIFFUSED ASYMMETRIC	828	63.69	 TEXTURED GREY