


601201 HYDROSTICK LED



680mm height bollard, rectangular shape for outdoor surface installation, with 180° diffused light emission from one side, phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, opaline PMMA diffuser, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 48 low-power LED. Anchorage bolts included. IP65 rating.

Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 48 x low-power SMD3528 LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- PMMA diffuser
- Anchorage unit included

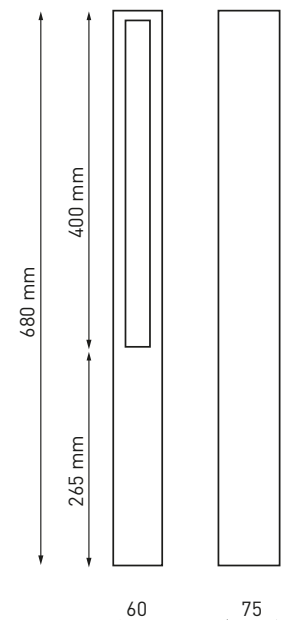

	LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
6 WATT 220-240V 50-60HZ ELECTRONIC IP65 3,00 KG UNIT GROSS WEIGHT	LOW-POWER LED	3.000°K WARM-WHITE	180°	350	58.34	TEXTURED GREY