

805009 SINGLE HYDROFLASH POLE MEGA LED

NEW

Round pole-mounted floodlight for outdoor installation on a pole diam. 60 mm or 76 mm. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Clamp for pole diam 60 mm or 76 mm included. Built-in LED driver 220-240V 50-60Hz, with 15 CREE XP-G2 high-power LED. IP65 rating.



Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 15 CREE "XP-G2" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.
- Double nickel-plated brass cable gland M20
- 3 mt. neoprene power cable included



1...10 V DALI

1-10 V DIMMABLE / DALI VERSION
AVAILABLE ON REQUEST

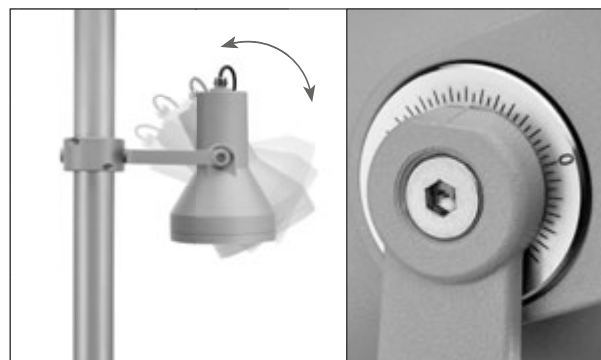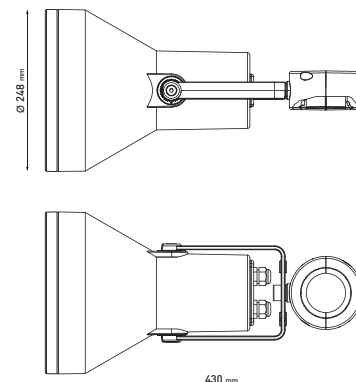

GRADUATED STAINLESS STEEL INSERT

22 WATT
220-240V 50-60HZ ELECTRONIC
IP65
5,50 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3.000°K WARM-WHITE	10°	2.160	98.18	☐ TEXTURED GREY ☐ MATT WHITE (ON REQUEST) ☐ MATT BLACK (ON REQUEST)
		30°	2.052	93.27	
		45°	1.949	88.60	
	4.000°K NEUTRAL-WHITE	10°	2.250	102.28	
		30°	2.137	97.14	
		45°	2.030	92.27	

POLES & ACCESSORIES

Full technical details of poles and accessories for poles are available at the end of the catalogue

BURIED POLES

CODE	HEIGHT MM.
809901	3.500
809902	4.500
809903	5.500
809909	ACC.

POLES WITH BASE-PLATE

CODE	HEIGHT MM.
809904	3.000
809905	4.000
809906	5.000
809907	ACC.
809909	ACC.